

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
7 July 2005 (07.07.2005)

PCT

(10) International Publication Number  
WO 2005/061944 A1

(51) International Patent Classification<sup>7</sup>: F16L 55/00,  
55/26, B08B 9/02, 9/049

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(21) International Application Number:  
PCT/NZ2004/000330

(22) International Filing Date:  
20 December 2004 (20.12.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
529182 20 December 2003 (20.12.2003) NZ

(71) Applicant and

(72) Inventor: NICHOLSON, Colin, Brian [NZ/NZ]; 479 Oropi Road, RD3, Tauranga (NZ).

(74) Agents: WILSON, Kathryn, S. et al.; Level 11, Price-waterhouseCoopers Centre, 119 Armagh Street, P.O. Box 2201, Christchurch (NZ).


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CE, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Published:**

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: SELF-PROPELLED VEHICLE FOR USE IN A CONDUIT

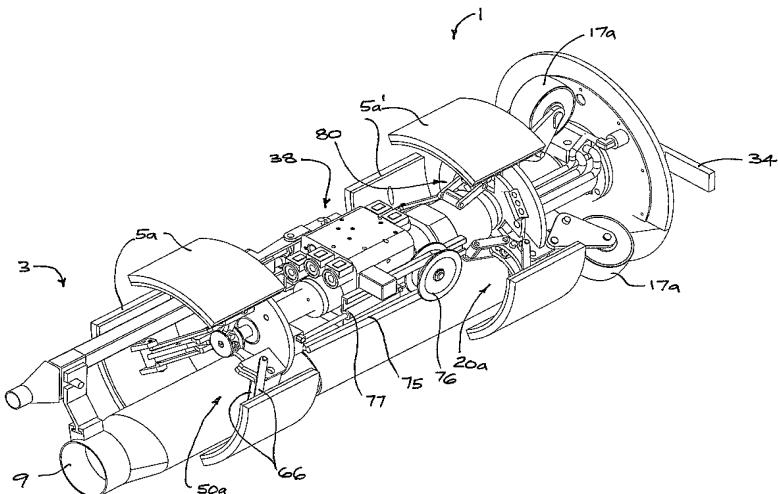

(57) **Abstract:** A vehicle for travel through a conduit includes a forward (1) and a rearward (3) member, each member being provided with a wall-engaging mechanism (50a) for selectively engaging a wall of the conduit to hold the respective member in a stationary position within the conduit. Extensible means such as a hydraulic ram (2) connect the members (1, 3) for relative movement of the forward member (1) toward and away from the rearward member (3). Each wall-engaging mechanism (50a) includes a plurality of legs (66) extendable outwardly from the respective member and a wall-engaging surface on or fixed to each leg, one actuator engages each of the legs for coordinated extension of the legs to bring each wall-engaging surface (5a) into contact with the wall of the conduit. Preferably a rotary cutter (34) is mounted at the front of the vehicle for clearing obstructions in the conduit.

WO 2005/061944 A1